

HYDRAULIC DETACHABLE GOOSENECK



120 HDG

Standard Features (110 HDG)

- Front Hydraulic Detachable Narrow Neck
- Approximately 35" Travel
- 7 Position 5th Wheel Height
- 12' 5" Gooseneck
- 108" Swing Clearance
- 16" King Pin Setting
- 24' Main Deck
- 102" Wide
- 10 Bent D-Rings
- Open Wheels With Bolsters
- LED Lighting
- Mud Flaps
- Limit Chains On All Axles
- 54" Axle Spacing
- Prep for Booster
- Outriggers
- Run off Wet Line
- 3 Axle
- Chemisolid Epoxy Polyester Primer & Top Coat
- Paint in Black, IH Red or New Cat Yellow

Available Models

XL 70 HDG	XL 100 HDG	XL 110 HDG
XL 80 HDG	XL 102 HDG	XL 120 HDG

*Photos may show some optional equipment

THE PATENTED CHEATER allows the driver to hydraulically slide the king pin to change axle weights or swing clearance. The driver can also attach and detach the gooseneck without getting back into the tractor cab.




Primary Options

- "The Cheater"
- Full Width Gooseneck
- Flip Axle
- Widths and Lengths Optional on Special Request
- Detachable Wheel Area
- 13 HP Self-Contained Power Unit
- Dual Hydraulic System
- Steel Fenders For Gooseneck
- Removable Swing Out Outriggers
- Additional D-Rings
- Covered Boom Trough
- Aluminum Mill/Polished Wheels
- 30,000 lb. Suspension
- Liquid Filled Air Gauge
- 7 Position Manual Ride Height Control
- 3rd Tail Light Package
- Air Weigh Digital Scale

.....Plus Many More Options

HYDRAULIC DETACHABLE GOOSENECK

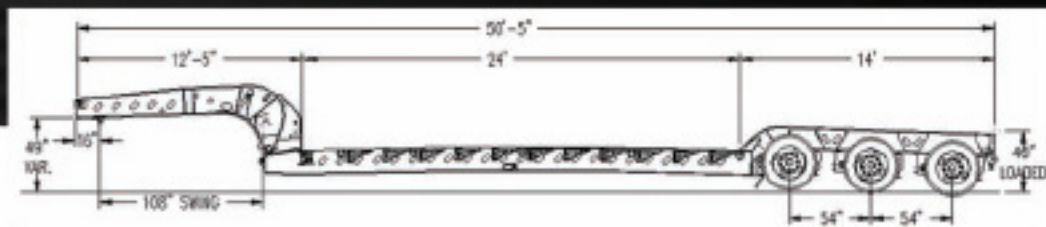

MODEL: XL 110HDG **DIST: 110,000#** **OAL: 50' 5"**
CONCENTRATED: 110,000# IN 10' **OAW: 102"**

GOOSENECK

12' 5" NARROW NECK
 16" KING PIN SETTING
 108" SWING CLEARANCE
 49" 5TH WHEEL HEIGHT
 7 POSITION 5TH WHEEL HEIGHT
 RUN OFF WET LINE
 AIR OPERATED LOCK PIN
 APP. 35" GOOSENECK TRAVEL

MAIN DECK

24' MAIN DECK LENGTH
 (4) 16" FAB I-BEAMS
 T I FLANGE, 80K WEB
 102" WDE
 24" LOADED DECK HEIGHT
 8" GROUND CLEARANCE
 10" & 4" JR I-BEAM ON 12" ALT CENTERS
 (5) BENT D-RINGS PER SIDE-10 TOTAL
 1 3/8" APITONG DECKING RAISED
 CENTER DECK OPEN
 SWING OUT OUTRIGGERS WITH 24" CENTERS DOUBLE AT FRONT

REAR BRIDGE

14' REAR BRIDGE
 40" LOADED DECK HEIGHT
 102" WIDE
 OPEN WHEELS OPEN BOOM
 (2) BENT D-RINGS IN TAIL CHANNEL
 (1) PAIR OF FLAGHOLDERS
 FRAME REINFORCEMENT
 FOR SINGLE AXLE BOOSTER

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000 # NOMINAL
 54" SPACING
 HUB PILOT, OUTBOARD DRUMS
 NO ABS - 1 PAIR SPRING BRAKES
 16 1/2" X 7" BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RMS
 255/ 70R/ 22.5 TIRES

LIGHTING

12V SEALED GROTE HARNESS
 D.O.T. APPROVED (7 YR LIMITED WARRANTY)
 RUBBER MOUNT LED LIGHTS
 (1) MID-TURN SIGNAL / SIDE
 (2) CLEARANCE LIGHTS / SIDE
 7 POLE ELECTRICAL SOCKET
 2 TAIL LIGHT PKG W/ ALUM. COVER
 LED LIGHTING

PAINT

BLACK, IH RED, NEW CAT YELLOW
 CHEMISOLID EPOXY POLYESTER PRIMER
 CHEMISOLID EPOXY POLYESTER TOPCOAT
 AIR & ELECTRIC DONE AFTER PAINT
 RED & WHITE CONSPICUITY TAPE

*Photos may show some optional equipment

Available Models

XL 70 HDG XL 102 HDG "Competitor"
 XL 80 HDG XL 110 HDG
 XL 100 HDG XL 120 HDG

